

# FIRST CUT 9FT RAIL & CONNECTOR KIT















SKU: CM034



# USER MANUAL

[WWW.CHAINSAWSPARES.COM.AU](http://WWW.CHAINSAWSPARES.COM.AU)

# Parts List


NO	QTY (Length> 3ft)	PIC	DESCRIPTION
1	6		Side rail
2	4		Cross bar
3	4		Dog
4	8		Dog hinge plate
5	4		Connect bar
6	8		Leveling screw
7	8		Butterfly screw
8	12		Small nut
9	4		Cross bolt
10	8		Long bolt
11	8		Carriage bolt
12	24		Small Washer
13	8		Large Washer
14	8		Large nut

## Assembly Instructions

1. Unpack the rail kit and lay out all parts for ease of access.
2. Attach both dog hinge plates (No. 4) to cross bar (No. 2), with bolts washers and nuts (No. 8, 10, 12). Do not tighten until dog is attached.



3. Attach dog (No. 3) to the hinge plate (No. 4) with bolts, washers and nuts (No. 8, 9 & 12). Tighten all bolts.

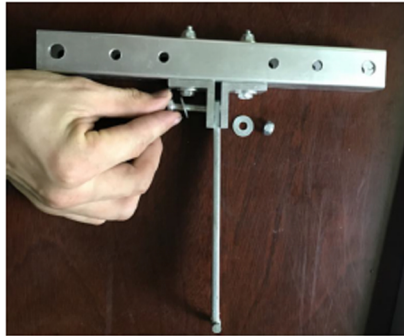

4. Assemble carriage bolts (No. 11), nuts and washers (No. 13 & 14) through cross bar (No.2). Leave loose. Head of carriage bolt must be as shown.



5. Install levelling screws (No.6) into the cross bar (No.2). Slotted end of the screw is in the same direction as the carriage bolts.


6. Repeat for all cross bar kits.

7. Slide carriage bolts in cross bar into rails. Do not tighten until mill is setup with the EZ-RAILS on the log. Dog orientation can be in either direction.

8. Once cross bars are located on log, tighten carriage bolts.



9. To extend the rail, use 2 of the connect bars (No. 5) and fasten each end with a butterfly screw. (No. 7).

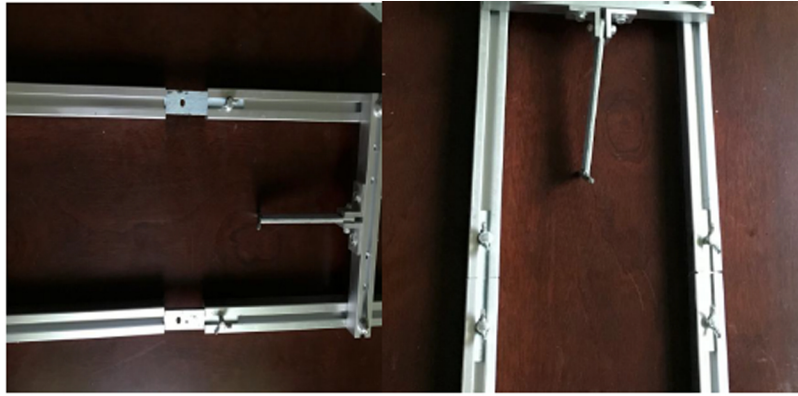

## Exploded View

